



FRM220-1000TS

1000Base-T to 1000Base-X SFP Media Converter

The FRM220-1000TS is a transparent Gigabit Ethernet 1000Base-T to 1000Base-SX/LX SFP converter with very low latency. They are managed (when installed in FRM220 with NMC) or non-managed stand-alone media converters, which give you the options to choose from a wide range of industry standard SFP modules with LC connectors. SFPs in multi-mode and single mode types are available as well as BiDi which allows bi-directional transmissions using only a single fiber cable. Because they are completely transparent to Ethernet packets, they are able to support any size frames, including undersized or jumbo packets (>9K bytes). LED indicators signal the power status of the converter, UTP port speed, Link, and duplex status, FX port Link and duplex status.

Features


- 1000Base-T to 1000Base-SX/LX
- Device management via FRM220 Chassis with NMC
- Auto-negotiation or force mode
- Auto MDI/MDIX
- Forward > 9K bytes packets
- Supports Link Fault Pass Through (LFP) function
- Auto Laser Shutdown (ALS)
- Protocol Transparent

Specifications

Optical Interface	Connector	SFP LC
	Data rate	1000Mbps
	Duplex mode	Full duplex
	Fiber	MM 50/125µm, 62.5/125µm SM 9/125µm
	Distance	MM 550m, 2km, SM15/30/50/80/120km WDM 20/40/60km
Wavelength	MM	1310nm, SM 1310,1550nm
	WDM	1310Tx/1550Rx (type A) 1550Tx/1310Rx (type B)
Electrical Interface	Connector	RJ45
	Data rate	1000Mbps
	Duplex mode	Full duplex
	Cable	10Base-T Cat.3, 4, 5, UTP

Standard	IEEE 802.3ab
Indications	LED (Power, FX-Link, FX Duplex, TX-SPD, TX-Duplex, TX-Link)
Power Input	Card : 12VDC Standalone : AC, DC options
Power Consumption	< 12W
Dimensions	Card: 155 x 20.8 x 88mm (D x W x H)
Weight	120g
Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)
Humidity	10 ~ 90% non-condensing
Certification	CE, FCC, LVD
MTBF	65,000 hrs (25°C)

Application

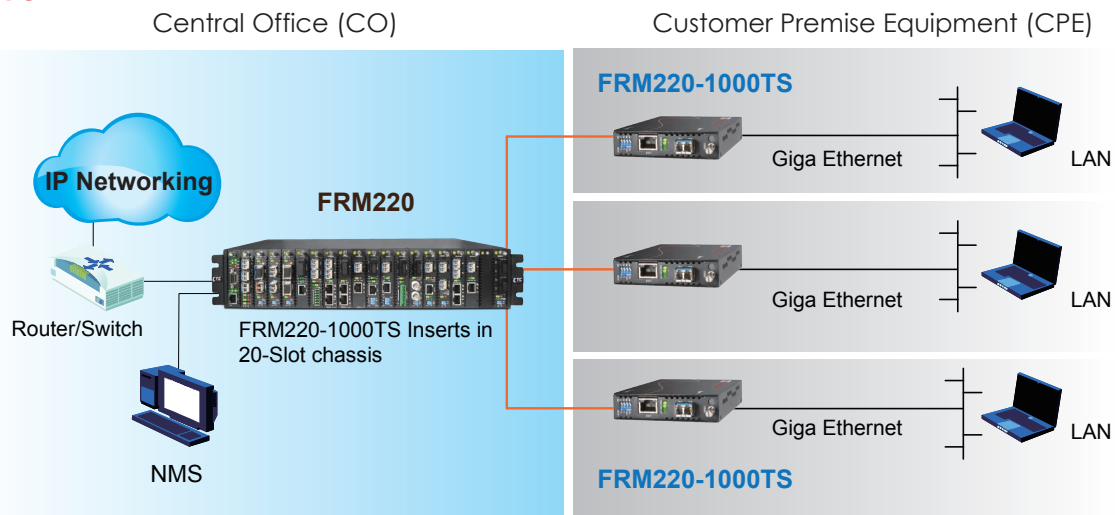

Ordering Information

Model Name	Description
FRM220-1000TS	1000Base-T to 1000Base-X SFP media converter card (Optional SFP)

Note: This Card is suitable for use in CH01 standalone chassis