



IMC-1000MS

100/1000Base-T to 100/1000Base-X SFP
Managed Fiber Converter



IMC-1000MS is a 10/100/1000Base-T to 100/1000Base-X manageable Gigabit Ethernet media converter which offers dual speed fiber transmission. Housed in rugged DIN rail or wall mountable enclosures, these converters are designed for harsh environments, such as industrial networking and intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications. The converters are manageable by Web, SNMP or In-Band management for Operation, Administration, Maintenance & Provisioning, which includes bandwidth control, speed, VLAN, Diagnostic, storm filter and converter configurations. In addition, network administrators can manage IMC-1000MS via standard SNMP manager such as SmartView™. It also provide loop-back test and dying gasp, and can be monitored from a centrally located OAM-enabled FRM220-1000MS converter via remote in-band management.

Features

- Conversion between 10/100/1000Base-T and 100/1000Base-X Fiber cable interface
- Supports Dual Rate (100/1000) SFP for selectable Fast or Gigabit speed on fiber
- Redundant dual DC input power 12/24/48VDC (9.6 ~ 60VDC)
- IP30 rugged metal housing and fanless
- Wide operating temperature -20~75°C (IMC-1000MS-E)
- UL60950-1, CE, FCC, RailWay traffic EN50121-4 certification
- Heavy industrial grade EMS, EMI EN61000-6-2, EN61000-6-4 certification
- MIB counters
- Supports LFPT (Link Fault Pass Through)
- Auto Laser Shutdown (ALS)
- Supports Digital Diagnostic Monitor Interface (DDMI) for SFP
- Supports SmartView for centralized management (Please see Catalog chapter 1- Software Management for more details)
- Supporting Central EMS for management of upto 50 SmartView Server ,and 25,000 device (maximum) (Please see Catalog chapter 1- Software Management for more details)
- Web management (Figure 3)
- SNMP management (Figure 1)
- Supports 16 IEEE 802.1Q Tag VLAN Group
- SNMP alarm trap for power loss and port link down
- Supports in-band management from FRM220 Chassis With FRM220-1000MS (Figure 2)
- Remote loop back test
- Dying gasp (remote power failure detection)

Specifications

| | | | |
|---------------------------------------|--|------------------------------------|---|
| Standard | IEEE802.3 10Base-T 10Mbit/s Ethernet IEEE802.3u 100Base-TX, 100Base-FX, Fast Ethernet IEEE802.3ab 1000Base-TX Gbit/s Ethernet over twisted pair IEEE802.3z 1000Base-X Gbit/s Ethernet over Fiber-optic IEEE802.3x Flow Control and Back pressure IEEE802.3ah OAM management | LED | Per Unit : Power 1 (Green), Power 2 (Green), Fault (Amber) Fiber LNK/ACT (Green): ON: Connected to network OFF: Not connected to network BLK: Receive /Transmit Data Fiber speed : Yellow : 1000Base-X Green : 100Base-X RJ-45 port: Speed: 10 (OFF), 100 (Green), 1000 (Yellow) |
| Fiber Ports | 100Base-X or 1000Base-X set by Web Supports Auto Laser Shutdown (ALS) Supported DDMI for SFP diagnostic | LED | LNK/ACT for RJ45(Green): ON : Connected to network/ OFF: Not connected to network/ BLK: Networking is active |
| RJ45 Ports | 10/100/1000Base-T Auto MDI/MDI-X and Auto-Negotiation Function Supports UTP CAT.5e Twisted Pair cable | Reverse Polarity Protection | Supported for power Input |
| CPU watch dog | Supported | Overload Current Protection | Supported |
| Push Button | Reset, Load default setting | Power Supply | 12/24/48VDC (9.6~60VDC) , Redundant power with polarity Reverse protect function and removable terminal block |
| Jumbo Frame | 9K bytes | Alarm Relay Contact | Relay outputs with current carrying capacity of 1 A @24VDC Relay alarm output for power fail or port link down |
| Fiber Parameters | Fiber Cable (Multi-mode): 50/125um,62.5/125um Fiber Cable (Single-mode): 9/125um Wavelength: 1310nm (Multi-mode/Single-mode) SFP, Distance depend on plug-in Fiber Transceiver | Removable Terminal Block | Provides 2 redundant power, alarm relay contact, 7 Pin |
| Link Fault Pass Through (LFPT) | TX-Fiber: If TX port link down, the media converter will force Fiber port to link down Fiber-TX: If Fiber port link down, the media converter will force TX port to link down | Power Consumption | 4.8 W |

| | |
|---|--|
| Operating Humidity | 5% ~ 95% (Non-condensing) |
| Operating Temperatur | -20 ~ 75°C (IMC-1000MS-E), -10~60°C (IMC-1000MS) |
| Storage Temperature | -40 ~ 85°C |
| Housing | Rugged Metal, IP30 Protection and fanless |
| Dimensions | 106 x 38.6 x 142.1mm (D x W x H) |
| Weight | 0.62kg |
| Installation | DIN Rail mounting, or wall mounting (Optional) |
| MTBF | 1,153,428 Hours MIL-HDBK-217 |
| Warranty | 5 years |
| Certification | |
| EMI | CE |
| EMI (Electromagnetic Interference) | FCC Part 15 Subpart B Class A, CE |
| Railway Traffic | EN50121-4 |

| | |
|--|--|
| Immunity for Heavy Industrial Environment | EN61000-6-2 |
| Emission for Heavy Industrial Environment | EN61000-6-4 |
| EMS (Electromagnetic Susceptibility) Protection Level | EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A |
| Safety | UL60950-1 |
| Shock | IEC 60068-2-27 |
| Freefall | IEC 60068-2-32 |
| Vibration | IEC 60068-2-6 |

Software Specifications

| | |
|---------------------------------------|--|
| SNMP or Web Mode (figure 1, 3) | |
| Management | Ingress/Egress bandwidth control with 64K granularity Web management, Firmware upgrade via Web Supports SNMP, MIB for management Supports DHCP client for automatic IP configuration Supports 802.1Q tag VLAN, 16 Tag VLAN group, MIB counters display |
| Configuration | IP configuration, password setting, converter configuration port configuration, MIB counter, SNMP configuration VLAN group configuration, alarm configuration PoE Configuration |
| Diagnostic & Monitor | Supports Link Fault Pass-Through (LFPT) Function Broadcast/Multicast/Unicast storm filter SNMP alarm trap for power loss and port link Up/Down |

| | |
|---------------------------------------|--|
| In-Band Remote mode (Figure 2) | |
| Management | Supports in-band management from FRM220 Chassis With FRM220-1000MS card Ingress/Egress bandwidth control with 64K granularity |
| Configuration | IP configuration, converter configuration, port configuration, MIB counter VLAN group configuration, alarm configuration, PoE Configuration |
| Diagnostic & Monitor | Remote loop back test Supports Link Fault Pass-Through (LFPT) Function Broadcast/Multicast/Unicast storm filter |

Application

Figure 1 : IMC-1000MS Management by SNMP, SmartView

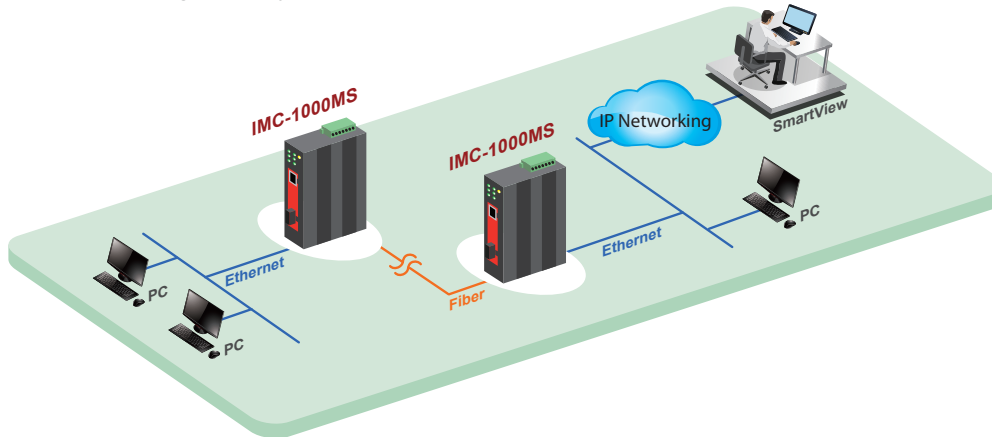


Figure 2 : IMC-1000MS Application in Remote, in-band Management



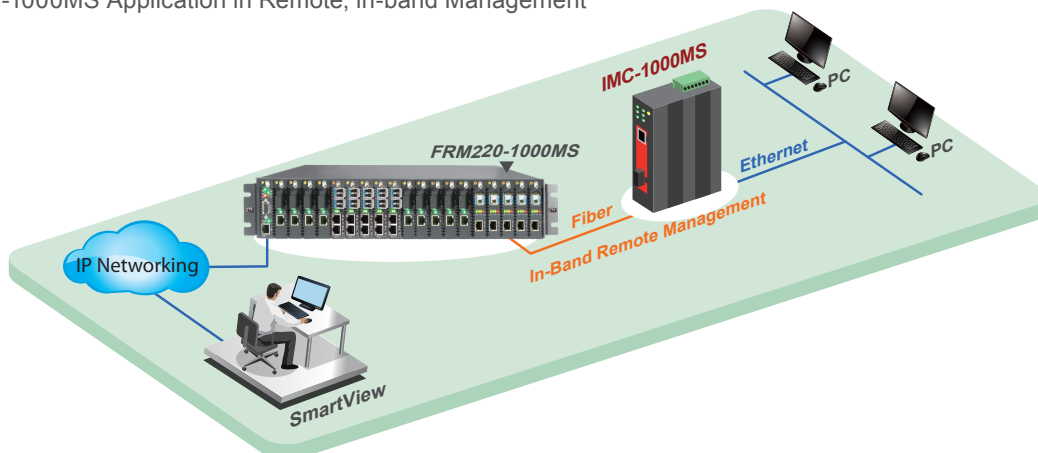


Figure 3 : IMC-1000MS Application in Web Management

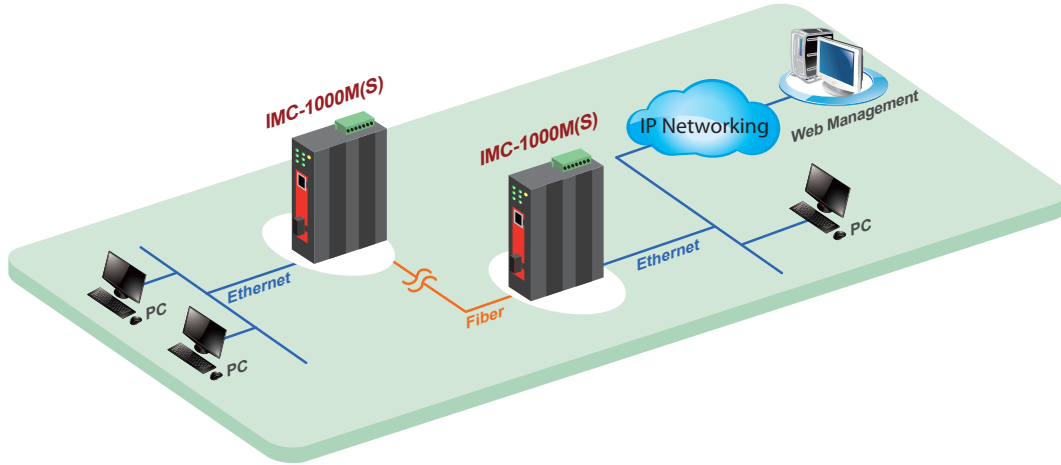


Dimensions

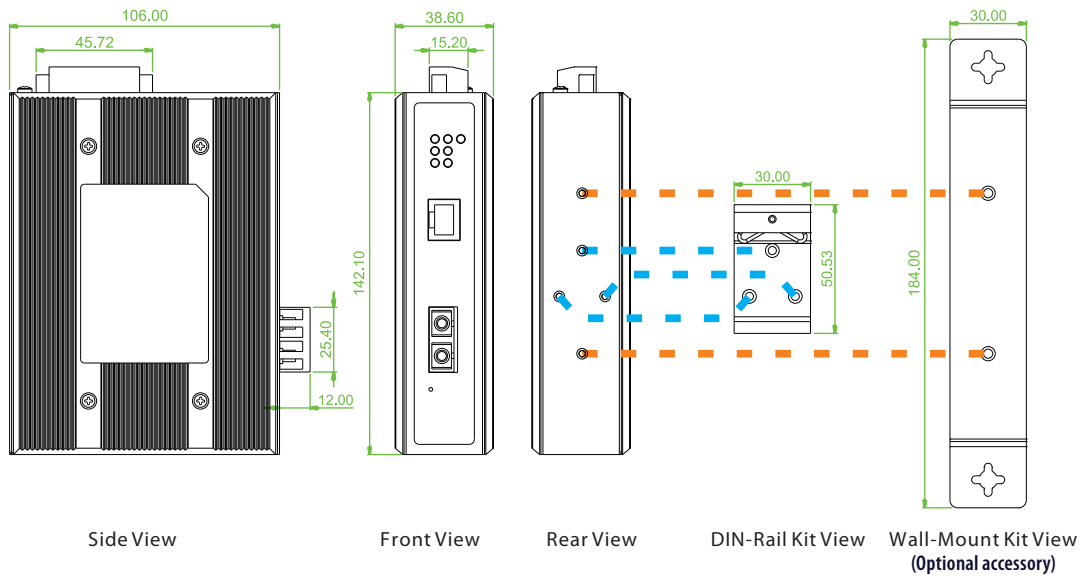

Ordering Information

| Model Name | Managed | RJ45 UTP Port | Fiber | Power Input | Certification | | | | | Operating Temperature |
|--------------|---------|--------------------|---------------------------|-------------|------------------|-------------------|-------------------------|----|-----|-----------------------|
| | | 10/100/1000 Base-T | Dual Speed 100/1000Base-X | Redundant | Safety UL60950-1 | Railway EN50121-4 | EN61000-6-2 EN61000-6-4 | CE | FCC | |
| IMC-1000MS | V | 1 | 1 SFP | 12/24/48VDC | V | V | V | V | V | -10~60°C |
| IMC-1000MS-E | V | 1 | 1 SFP | 12/24/48VDC | V | V | V | V | V | -20~75°C |

Model Naming Rule

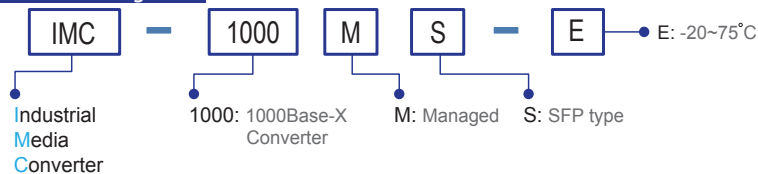

■ Package List

- CD (MIB file, Manual)
- Quickly installation guide
- Din Rail with screws
- Terminal block
- Protective caps for SFP ports

Optional Accessories

■ Wall mount kit Accessories

| | |
|-----------|---|
| IND-WMK01 | Wall Mount kit for Industrial product, 184 x 30mm |
|-----------|---|

■ Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the IMC-1000MS for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheet for more details and more items.)

| | |
|--------------------|---|
| ISFP-M7000-85-D(E) | Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, DDMI, LC, -10~70°C (-40~85°C) |
| ISFP-S7020-31-D(E) | Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C) |
| ISFP-T7T00-00-(E) | Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C) |
| ISFP-M5002-31-D(E) | Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C) |
| ISFP-S5030-31-D(E) | Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C) |

SFP Naming Rule

